


# Star Flood Medium (SFA-SFAR)



Suitable for wet locations  
 SFA - Lamp not included  
 SFAR - Lamp included

Effective Projected Area  
 EPA = 3.02 SQ. FT.  
 WEIGHT = 50-70 lbs

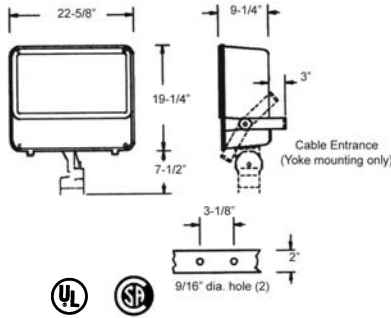

Solid Line - NEMA Heavy Duty  
 Dotted Line - NEMA General Purpose

Accessories/Mounting Brackets,  
 see Accessory Page

### Star Flood Specification

Star Flood-SFA, NEMA heavy duty, wide beam rectangular weatherproof floodlight, shall accommodate a 250 to 1000 watt mogul base high pressure sodium lamp or 250-400 watt mogul base metal halide lamp.

Star Flood-SFAR, NEMA heavy duty, wide beam rectangular, weatherproof floodlight, furnished with 1000W, BT-37, mogul base, compact metal halide lamp. Available with (specify) 120, 208, 240, 277, 480 volt or 4MT (120, 208, 240, 277V) 60Hz ballast. The floodlight shall be completely pre-wired and factory assembled.

### Basic Product Description

Cast aluminum ballast and lamp housing compartment contains thermally isolated wiring. Floodlight is finished in all weather bronze polyester powder coating (optional colors available). Floodlight shall include a sturdy two hole mounting yoke formed of high strength non-corrosive aluminum. Wiring compartment access through lens door. Adjustable knuckle 2" to 2 1/2" pipe (2 3/8" to 2 7/8" O.D.) mounting is available. All stainless steel hardware. The tempered clear glass lens is thermal shock and impact resistant.

### Ballast Characteristics

The floodlight shall contain a U.L. recognized High Power Factor, constant wattage auto-transformer type ballast and start and operate the lamp down to -20°F (-30°C) for metal halide and -40°F (-40°C) for high pressure sodium. Mercury vapor lamps may be used in 400 watt metal halide fixtures. For availability of 220/240V 50Hz ballasts - consult factory.

### Reflector Assembly

Cast hinged lens frame with silicone gasket provides easy front access to lamp. A precision formed anodized finished reflector provides wide beam distribution.

### Suggested Applications

Building, automobile sales lot and general security lighting.

### Ordering Example

Unit	Wattage	Photometrics	Mounting	Lamp Style	Voltage	Ballast Sstyle
SFA-SFAR	4	7	1	H	208	H
Star Flood	4 - 250 6 - 400 8 - 1000*	7 - Wide Beam	1-Yoke Mount 4-Knuckle Mount (factory installed)	H - Metal Halide LS - High Pressure Sodium	120 208 240 277 480 4MT- (120, 208, 240, 277V) LB - Less Ballast**	H - High Power Factor

### Accessories

#### V

- V - Visor
- LS - Lamp Support
- SIF - Single Inline Fuse (120, 277v)
- DIF - Double Inline Fuse (208, 240, 480v)
- FB - Filter Breather
- PL - Vandal Resistant Polycarbonate Shield
- SC - Stainless Steel Safety Cable
- RPC - Factory Wired Twist Lock Photocell Receptacle Only
- PE - Twist Lock Photocell
- 3/14/3S0 - 3 ft. cord. for other length change 3' to length desired
- UP - for aiming above horizontal



\*Note: 1000W HPS lamp is mounted horizontally.

CSA Certification - consult factory.

\*\*Consult factory

# Star Flood Medium (SFA-SFAR)

## Photometrics

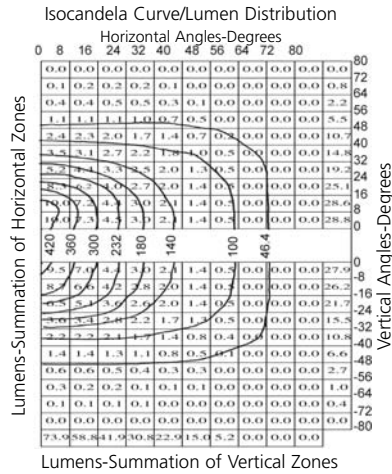
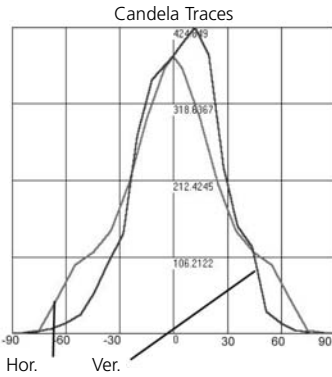


Fixture: SFA-671LS  
Lamp: 400 Watt Clear High Pressure Sodium

IES Type: 7H X 5V  
Max Candela: 464  
Hor Field Angle (10%): 132.6 deg  
Ver Field Angle (10%): 98.1 deg  
Field Lumens: 473  
Total Lumens: 498  
Total Efficiency: 49.8%

Candela & Lumen values are based on 1,000 lamp lumens. For other lamp lumen ratings, multiply candela and lumen values by the number: Lumens divided by 1,000.

Per 1,000 Lamp Lumens

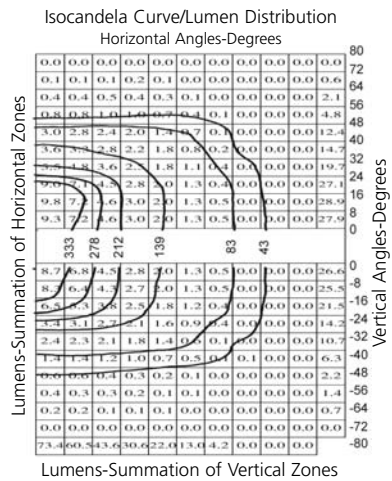
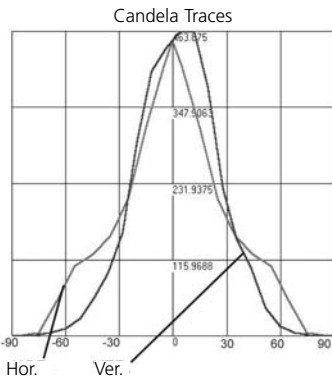


Fixture: SFA-671H, SFAR-871H  
Lamp: 400, 1000 Watt Clear Metal Halide

IES Type: 7H X 5V  
Max Candela: 425  
Hor Field Angle (10%): 133.1 deg  
Ver Field Angle (10%): 98.9 deg  
Field Lumens: 466  
Field Efficiency: 46.6%  
Total Lumens: 493  
Total Efficiency: 49.3%

Candela & Lumen values are based on 1,000 lamp lumens. For other lamp lumen ratings, multiply candela and lumen values by the number: Lumens divided by 1,000.

Per 1,000 Lamp Lumens

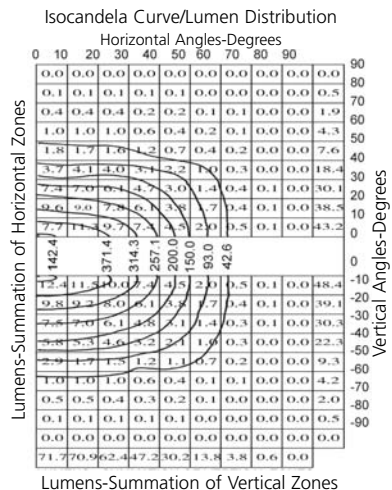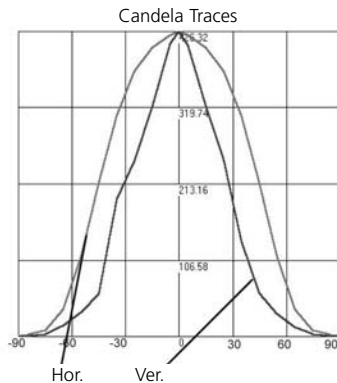

Fixture: SFA-851LS  
Lamp: 1000 Watt Clear High Pressure Sodium

IES Type: 6H X 6V  
Max Candela: 426  
Hor Field Angle (10%): 128.9 deg  
Ver Field Angle (10%): 103.1 deg  
Field Lumens: 568  
Field Efficiency: 56.8%  
Total Lumens: 606.6  
Total Efficiency: 60.7%

Candela & Lumen values are based on 1,000 lamp lumens. For other lamp lumen ratings, multiply candela and lumen values by the number: Lumens divided by 1,000.

Per 1,000 Lamp Lumens

ACCESSPOINT Inc. Lowering Systems

www.access-point.ca • 905-648-1013 • tbreaky@access-point.ca